

MODEL: LCS6337A75T*




PERSPECTIVE VIEW - N.T.S. MODEL SHOWN HERE AS: RIGHT SEAT

RIGHT PLUMBING


ALL ACCESORIES OPTIONAL



TOP VIEW - SCALE $\frac{3}{8}$ " = 1'-0"



ADA COMPLIANT



Features:

-ADA compliant roll-in shower -Available in various threshold heights -Molded, one piece gelcoat/fiberglass shower module -"Classic Tile" wall finish, white (standard) -Integral full wood backing for strength

and unlimited accessory placement -On all threshold heights 1-1/2" or taller, no mud set is required

-On all threshold heights 1-1/4" or shorter, no mud set is required, but an epoxy adhesive kit is supplied

*OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST

	UNIT	THRESHOLD
	HEIGHT	HEIGHT
MODEL#	Y	Z*
LCS6337A75T	78-3/4"	3/4" MIN.
LCS6337A2T	80-1/4"	2" MAX.

* - SEE BACK FOR DETAIL SECTIONS

PRODUCT SPECIFICATIONS:

-One piece shower module shall be constructed of gelcoat/fiberglass with full integral plywood backing -Rough-In: Stud opening +1/4" -0" Nominal Dimensions.

C.S.I. FORMAT SPECIFICATION TEXT AVAILABLE

PRODUCT INFORMATION:

-Accessories: Factory installed, unless prone to damage during installation/shipping. Polished chrome/satin stainless standard, others available. -Colors: White as standard, others to match any major fixture manufacturer, also available with sprayable solid surface in many colors -Custom curb heights, other than shown, are available (between min. and max.)

-Grab bar -Seat, folding -Mixing valve, pressure balanced, lever handle,

ACCESSORIES:

INSTALLED AT FACTORY:

preplumbed tree to supply elbow -Vacuum breaker -Soap dish -Wing wall

INSTALLED BY OTHERS:

- -Curtain and rod
- -T-Shaped Rubber WaterStopper Kit -Semi-permanent Threshold Adaptor
- -Semi-permanent

CODES:

Designed and manufactured in compliance with the following standards and codes: -A.N.S.I. Z124.2 Standards for Plastic Showers -I.P.C. International Plumbing Code

-A.D.A. Accessibility Guildelines for Buildings and Facilities

-A.N.S.I. A117.1 Accessible and Usable Buildings and Facilities


-U.P.C. Uniform Plumbing Code

NOTICE OF LIMITATION: -Recess as needed to meet code -Adhere to floor as required


BEST BATH SYSTEMS INC. WWW.best-bath.com 1-800-727-9907

We reserve the right to make revisions without notice in the design of fixtures or in packaging unless this right has specifically been waived at the time the order is accepted.

page 1 of 2

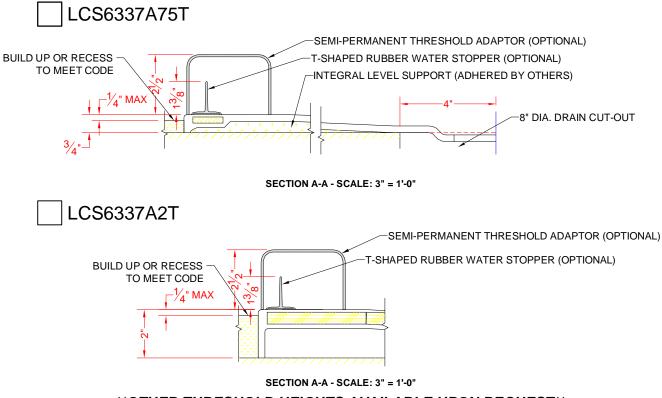

OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST

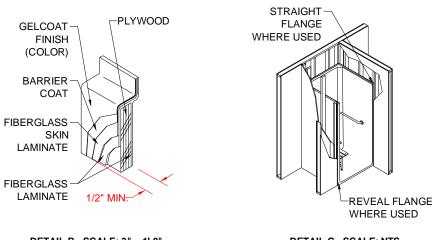

DETAIL B - SCALE: 3" = 1'-0" WALL SECTION DETAIL DETAIL C - SCALE: NTS TYPICAL FRAMING

